

HP11X-AC/AR185




FEATURES

- 18.5" TFT LCD display with a resolution of 1920×1080 or 1366×768
- The front panel complies with IP65 protection rating, ensuring stability and robustness
- Supports VGA and HDMI interfaces
- Capacitive Touchscreen/ Resistive Touchscreen
- Optional 12V/24V power supply
- Supports panel mount, wall mount, desktop mount or VESA arm mount installation

| Product Parameters |                       |                                                               |
|--------------------|-----------------------|---------------------------------------------------------------|
| LCD Screen         | Screen type           | 18.5" TFT-LCD                                                 |
|                    | Resolution            | 1920×1080 or 1366×768                                         |
|                    | Viewing angle(CR>=10) | 89/89/89/89                                                   |
|                    | Maximum color         | 16.7M                                                         |
|                    | Luminance             | 250 cd/m²                                                     |
|                    | Contrast ratio        | 1000:1                                                        |
|                    | Backlight type        | LED                                                           |
|                    | Backlight lifespan    | 30000h                                                        |
| Touch Screen       | Touch type            | 5-Wire Resistive Touchscreen/ 10-Point Capacitive Touchscreen |
|                    | Interface type        | USB2.0                                                        |
|                    | Transmittance         | >85%                                                          |
|                    | Surface hardness      | Mohs 7H                                                       |
| Overview           | Display interface     | VGA, HDMI                                                     |
|                    | Size                  | 472.0 x 301.5 x 45.0 mm                                       |

| Product Parameters               |                       |                                              |
|----------------------------------|-----------------------|----------------------------------------------|
| System                           | OS                    | Windows7, Windows 8, Windows 10,WES 7, Linux |
| Environ-<br>mental<br>parameters | Operating temperature | 0°C~60°C                                     |
|                                  | Storage temperature   | -20°C~70°C                                   |
|                                  | Storage humidity      | 10 ~ 90% @ 30°C (non-condensing)             |
|                                  | Vibration resistance  | 5~500 Hz, 1Grms (operating, random)          |
|                                  | Protection level      | The front panel has an IP65 rating           |

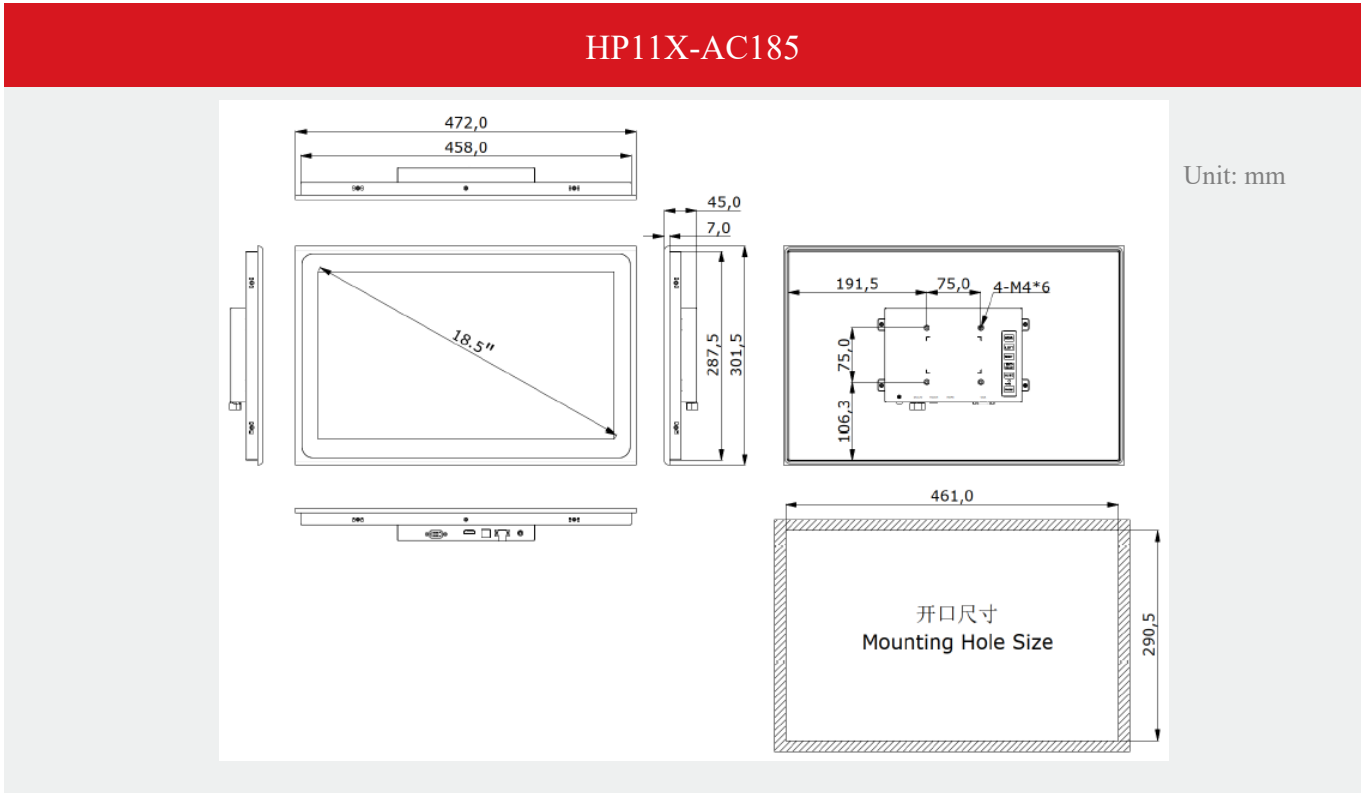

Interface Description

