

HP11X-AC104




FEATURES

- 10.4" TFT LCD display with a resolution of 1024x768/800x600
- The front panel complies with IP65 protection rating, ensuring stability and robustness
- Supports VGA and HDMI interfaces
- Capacitive Touchscreen/Resistive Touchscreen
- Optional 12V/24V power supply
- Supports panel mount, wall mount, desktop mount or VESA arm mount installation

Product Parameters		
LCD Screen	Screen type	10.4" TFT-LCD
	Resolution	1024x768/800x600
	Viewing angle (CR>=10)	-80~80° (H),-80~80° (V)
	Maximum color	16.7M
	Luminance	350 cd/m ²
	Contrast ratio	1000:1
	Backlight type	LED
	Backlight lifespan	30000h
Touch Screen	Touch type	10-Point Capacitive Touchscreen
	Interface type	USB2.0
	Transmittance	>85%
	Surface hardness	Mohs 7H
Overview	Display interface	VGA, HDMI
	Size	300.0 x 218.2 x 44.1 mm

Product Parameters		
System	OS	Windows® 7/8/10, WES 7, Linux
Environ- mental parameters	Operating temperature	-30°C~80°C
	Storage temperature	-30°C~85°C
	Storage humidity	10 ~ 90% @ 30°C (non-condensing)
	Vibration resistance	5~500 Hz, 1Grms (operating, random)
	Protection level	The front panel has an IP65 rating

HP11X-AC104

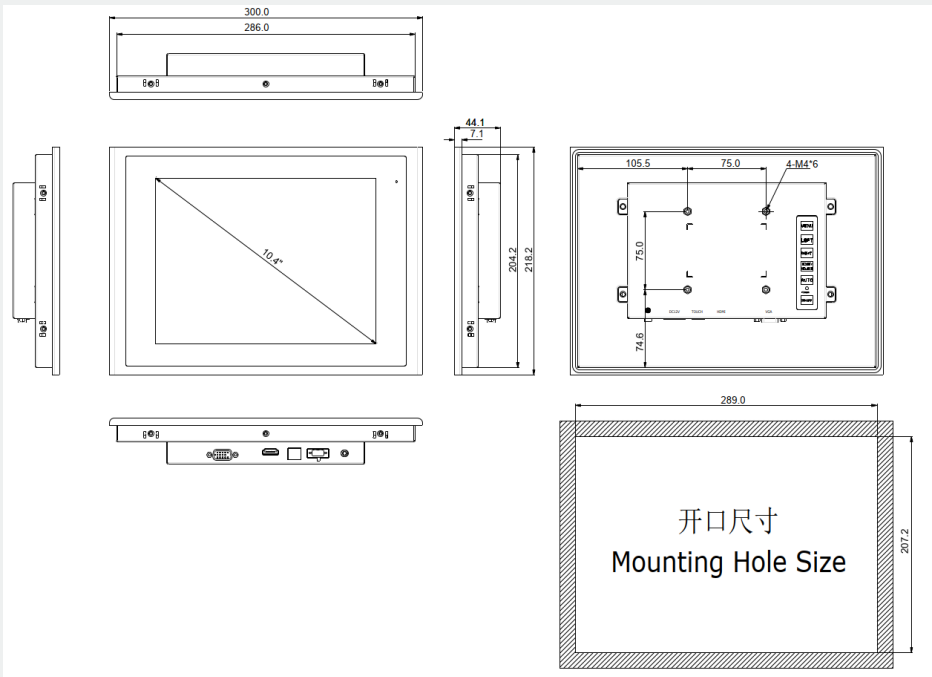

Unit: mm

Interface Description

