


HP11X-AC/AR19

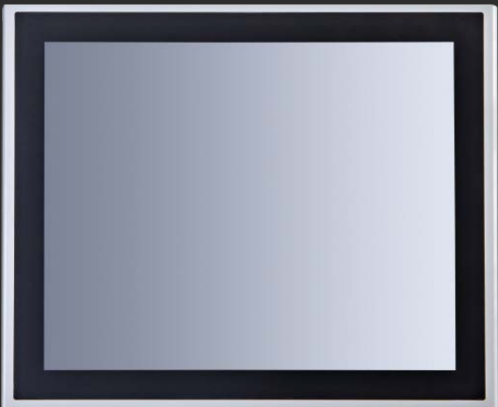


FEATURES

- 19" TFT LCD display with a resolution of either 1280×1024
- The front panel complies with IP65 protection rating, ensuring stability and robustness
- Supports VGA and HDMI interfaces
- Capacitive Touchscreen/ Resistive Touchscreen
- Optional 12V/24V power supply
- Supports panel mount, wall mount, desktop mount or VESA arm mount installation

Product Parameters		
LCD Screen	Screen type	19" TFT-LCD
	Resolution	1280×1024
	Viewing angle (CR>=10)	89/89/89/89
	Maximum color	16.7M
	Luminance	250 cd/m ²
	Contrast ratio	1000:1
	Backlight type	LED
	Backlight lifespan	30000h
Touch Screen	Touch type	5-Wire Resistive Touchscreen/ 10-Point Capacitive Touchscreen
	Interface type	USB2.0
	Transmittance	>85%
	Surface hardness	Mohs 7H
Overview	Display interface	VGA, HDMI
	Size	440.0 x 364.0 x 45.0 mm

Product Parameters		
System	OS	Windows7, Windows 8, Windows 10,WES 7, Linux
Environ- mental parameters	Operating temperature	0°C~60°C
	Storage temperature	-20°C~70°C
	Storage humidity	10 ~ 90% @ 30°C (non-condensing)
	Vibration resistance	5~500 Hz, 1Grms (operating, random)
	Protection level	The front panel has an IP65 rating

HP11X-AC19

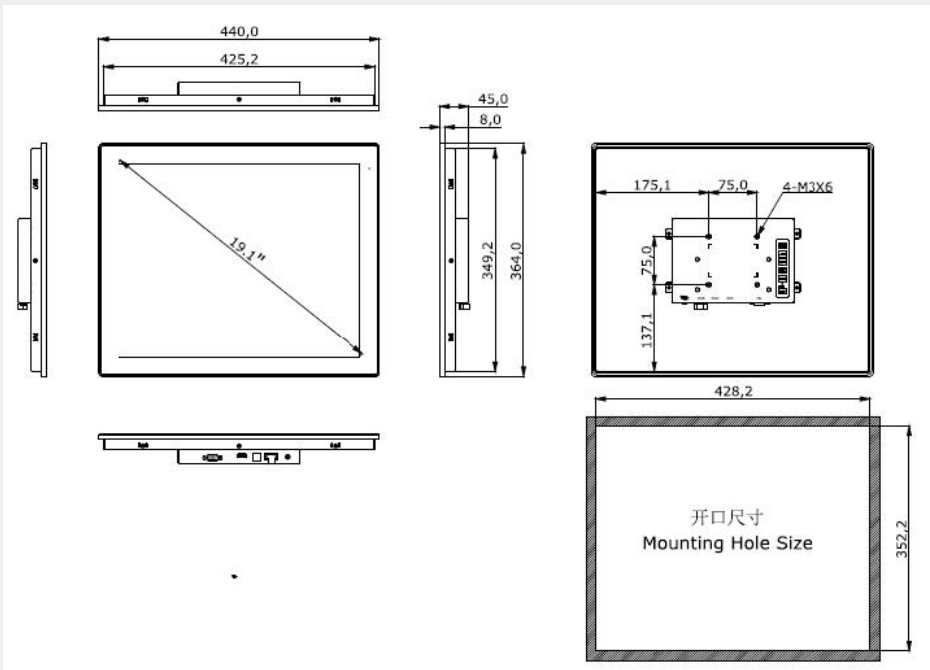

Interface Description

