

HP11X-AC/AR101




FEATURES

- 10.1" TFT LCD display with a resolution of 1280×800
- The front panel complies with IP65 protection rating, ensuring stability and robustness
- Supports VGA and HDMI interfaces
- Capacitive Touchscreen/ Resistive Touchscreen
- Optional 12V/24V power supply
- Supports panel mount, wall mount, desktop mount or VESA arm mount installation

Product Parameters		
LCD Screen	Screen type	10.1" TFT-LCD
	Resolution	1280 x 800
	Viewing angle (CR>=10)	85/85/85/85
	Maximum color	16.7M
	Luminance	430 cd/m ²
	Contrast ratio	800:1
	Backlight type	LED
	Backlight lifespan	34000h
Touch Screen	Touch type	5-Wire Resistive Touchscreen/ 10-Point Capacitive Touchscreen
	Interface type	USB2.0
	Transmittance	>85%
	Surface hardness	Mohs 7H
Overview	Display interface	VGA, HDMI
	Size	283.2 x 186.9 x 41.4 mm

Product Parameters		
System	OS	Windows® 7/8/10, WES 7, Linux
Environ- mental parameters	Operating temperature	-20°C~70°C
	Storage temperature	-30°C~70°C
	Storage humidity	10 ~ 90% @ 30°C (non-condensing)
	Vibration resistance	5~500 Hz, 1Grms (operating, random)
	Protection level	The front panel has an IP65 rating

HP11X-AC101

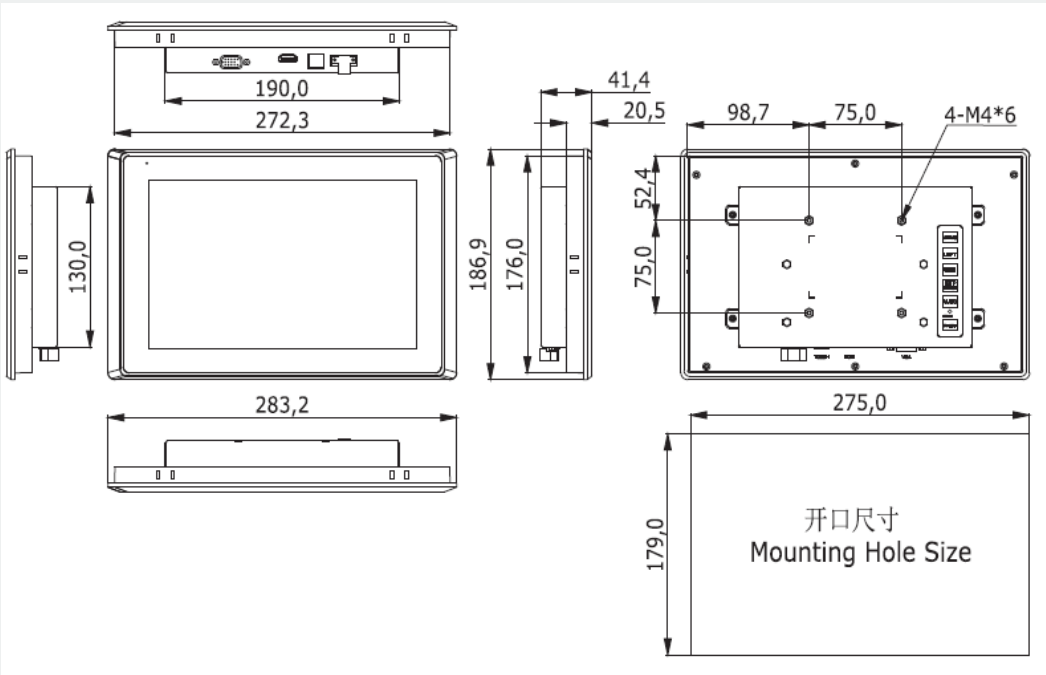

Unit: mm

Interface Description

