

HP11X-AC/AR215




FEATURES

- 21.5" TFT LCD display with a resolution of either 1920×1080
- The front panel complies with IP65 protection rating, ensuring stability and robustness
- Supports VGA and HDMI interfaces
- Capacitive Touchscreen/ Resistive Touchscreen
- Optional 12V/24V power supply
- Supports panel mount, wall mount, desktop mount or VESA arm mount installation

Product Parameters		
LCD Screen	Screen type	21.5" TFT-LCD
	Resolution	1920×1080
	Viewing angle (CR≥10)	89/85/89/89
	Maximum color	16.7M
	Luminance	300 cd/m ²
	Contrast ratio	1000:1
	Backlight type	LED
	Backlight lifespan	50000h
Touch Screen	Touch type	5-Wire Resistive Touchscreen/ 10-Point Capacitive Touchscreen
	Interface type	USB2.0
	Transmittance	>85%
	Surface hardness	Mohs 7H
Overview	Display interface	VGA, HDMI
	Size	536.2x 329.4 x 51.0 mm

Product Parameters		
System	OS	Windows7, Windows 8, Windows 10,WES 7, Linux
Environ- mental parameters	Operating temperature	-10°C~60°C
	Storage temperature	-20°C~70°C
	Storage humidity	10 ~ 90% @ 30°C (non-condensing)
	Vibration resistance	5~500 Hz, 1Grms (operating, random)
	Protection level	The front panel has an IP65 rating

HP11X-AC215

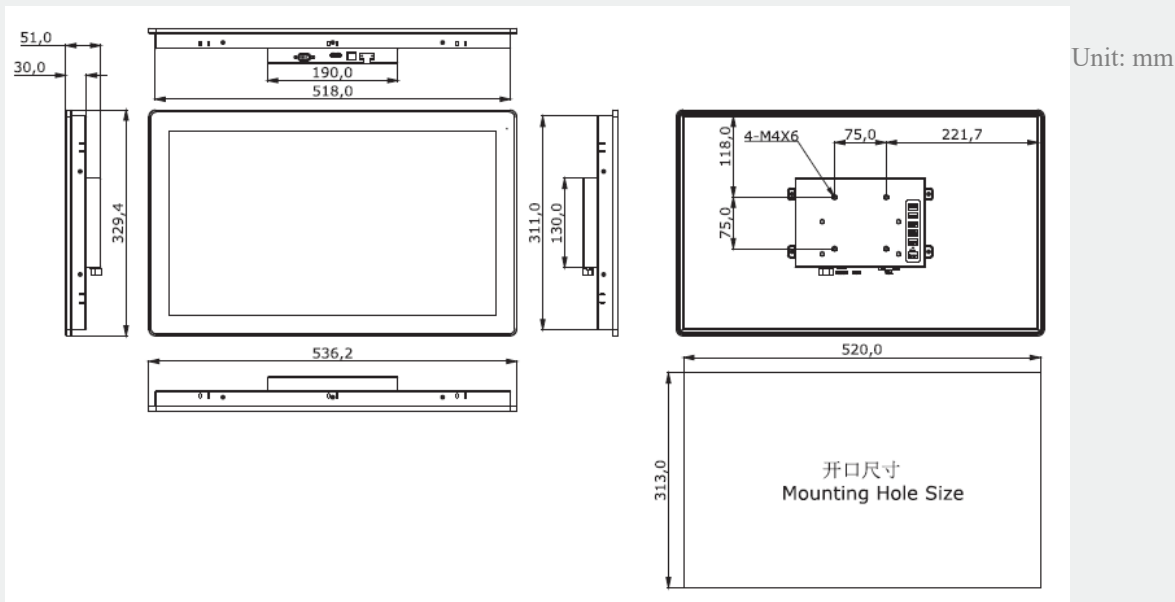

Interface Description

